

LeakBarrier® EasyStick Plus™ Self-Adhering Roofing System



SCAN to view
application video

LeakBarrier EasyStick Plus is a premium, SBS modified, granule surfaced, polyester reinforced, self-adhesive modified bituminous cap sheet membrane for use in most low slope and steep slope roof system applications. EasyStick Plus is a perfect alternative to the application of roofing using conventional application methods of torching, hot asphalt mopping, or using cold applied adhesives.

LeakBarrier EasyBase™ is a SBS modified, glass fiber reinforced, self-adhesive modified bituminous base sheet for use in most low slope and steep slope roof system applications. EasyBase has an ultraviolet resistant polyolefinic film surface and is specifically designed for use with EasyStick Plus cap sheets.

USAGE

LeakBarrier EasyStick Plus Self-adhering Roofing Systems are cost-effective and utilize easy-to-apply general purpose roofing sheets designed for use in new roofing and re-roofing. They are ideally suited for residential low-slope applications such as porches and carports or as flashing materials.

FEATURES AND BENEFITS

- ◆ Time-tested "Dual Compound" based SBS peel and stick membrane.
- ◆ No specific tools required. Clean, easy to handle, peel and stick self-adhering application.
- ◆ No fumes during application, eliminating odors caused by adhesives and hot asphalt.
- ◆ 30-40% quicker installation than conventional application.
- ◆ Excellent granule adhesion.
- ◆ Polyester reinforcement offers superior tensile, tear and elongation properties and ensures exceptional dimensional stability.
- ◆ Well defined four inch peel and stick side lap.
- ◆ Peel and stick selvage results in instant, watertight lap bond (5X of competitor products).
- ◆ Adheres to a variety of substrates.
- ◆ Meets and/or exceeds the applicable sections of ASTM D 6164 and ASTM D 1970 specifications.
- ◆ Miami Dade County Approval NOA No. 12-0703.05 and 12-0703.06
- ◆ Florida Building Code approved FL 9487-R5
- ◆ Texas Department of Insurance Approval RC-152
- ◆ UL Classified (R 13228) for use in Class A and B roofs (EasyStick Plus FR version).
- ◆ 10, 15, 20 and 25 Year Limited Warranties.

AVAILABLE COLORS


- ◆ Black, White, Cedar Blend, Dark Brown, Red, Weatherwood, Hickory, Slate Grey and Green.

STORAGE

- ◆ EasyStick Plus rolls must be stored indoors, in a dry location.
- ◆ Boxes must be stored on end only. Do not store in a leaning position.
- ◆ The rolls must be protected from the elements. Do not expose rolls to direct sunlight.
- ◆ Store rolls at room temperatures. Prolonged exposure to elevated temperatures may reduce the adhesive characteristics of the membrane.

GENERAL PRECAUTIONS

- ◆ Install EasyStick Plus only when material interface temperatures (air, deck, material) are 40°F and rising.
- ◆ Do not install when any form of moisture such as water, ice, snow, dew, rain, etc. is present.
- ◆ Ensure roof has proper slope and drainage prior to installation. The roof must meet Tarco's minimum slope requirements.
- ◆ Proper ventilation is critical. When applying over the entire roof deck, the roofing system must provide sufficient ventilation, including both ridge and soffit venting.
- ◆ A full, irreversible adhesion is achieved when the membrane goes through a complete heat cycle. Do not attempt to remove the membrane immediately after adhesion to the substrate.
- ◆ Use of a hand-held "hot air gun" might help enhance adhesion during application of membrane in cooler weather.

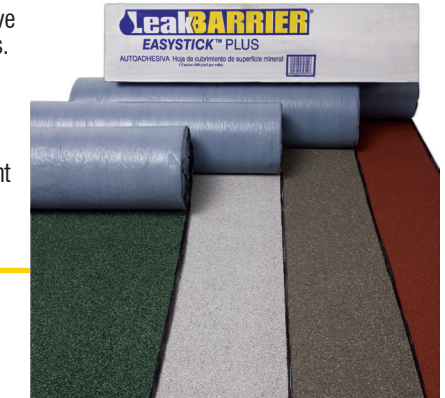

SURFACE PREPARATION

- ◆ Surface must be clean, dry, and without voids that may interfere with adhesion.
- ◆ For re-roofing, all old roofing and other loose materials must be removed prior to installation.
- ◆ When adhering to EasyBase™ self-adhering base sheet, remove any loose film from the EasyBase surface.
- ◆ If the EasyBase self-adhering base sheet has been left exposed for more than 30 days, prime the EasyBase surface prior to installation of the EasyStick Plus membrane.
- ◆ Acceptable substrates for adhesion of LeakBarrier membranes can be found at the Tarco website.
- ◆ For best results, EasyBase surface may be primed with an ASTM D 41 Primer prior to installation of EasyStick Plus. When primer is used, ensure the primer is fully dry prior to application of EasyStick Plus.

APPLICATION

- ◆ Cut the EasyStick Plus roll to suitable, manageable lengths before installation.
- ◆ Position the pre-cut EasyStick Plus beginning at the lowest corner of the roof where the eave (gutter edge) and rake (rising edge) intersect.
- ◆ Align EasyStick Plus so that it is parallel with the edge of the eave and extend over the eave and rake approx. 3/8".
- ◆ Starting at the middle and extending to one end of EasyStick Plus, drive securing nails in 18" centers in the side lap area, 1 1/2" from the edge. Do not drive the nails all the way in.
- ◆ Backroll the unsecured portion of the roll up the middle where the first securing nail is driven.
- ◆ Apply a 1/16" thick layer of asphalt plastic cement over the eave and rake metal drip edges extending 2" to 3" onto the deck surface where the roll will intersect.
- ◆ Carefully remove the release film the full width of the sheet and apply the EasyStick Plus membrane firmly into place as it is being applied, taking care to avoid wrinkling or creasing of the roll.
- ◆ Remove the securing nails from the other half of EasyStick Plus, backroll and apply in like manner.
- ◆ On slopes greater than 2:12, drive nails flush in the selvage area 1 1/2" from the edge on 18" centers, after EasyStick Plus has been applied and prior to the next overlapping course.
- ◆ Apply the next eave course in the same manner overlapping the first course at the end lap by 6".
- ◆ Apply a uniform 1/16" thick layer of asphalt plastic cement the full roll width to the surface of the first course in the 6" end lap area before adhering the next course.
- ◆ Remove release film covering the selvage, if present, prior to application of the sheet.
- ◆ Lap the succeeding course over the side lap area just to the granular edge of the preceding course.
- ◆ Apply succeeding courses in like manner, as in steps above.
- ◆ Stagger the end laps a minimum 3' from the preceding course.
- ◆ At the T-joint (where an end lap and next overlapping course intersect), apply a bead of roofing lap cement before the overlapping course is laid.
- ◆ Roll the entire membrane surface, paying special attention to side laps, end laps and T-joints. Roller weight shall be 70 lb. minimum for low slope (<2:12 pitch) and 28 lb. minimum for steep slope (>2:12 pitch).

PROPERTIES

PROPERTY	TYPICAL VALUE	TEST METHOD	PROPERTY	TYPICAL VALUE	TEST METHOD	PRODUCT DATA	
Max Load @ 0°F, MD & XMD	75 lbf/in	ASTM D6164	Dimensional Stability, max	1%	ASTM D6164	Width	36 in
Elongation @ 0°F, MD & XMD	20%	ASTM D6164	Compound Stability @ 215°F	Pass	ASTM D6164	Length	36 ft
Max Load @ 73.4°F, MD & XMD	55 lbf/in	ASTM D6164	Granule Adhesion	1 g loss	ASTM D4977	Thickness	120 mil (nominal)
Elongation @ 73.4°F MD & XMD	35%	ASTM D6164	Adhesion to Plywood @ 40°F	4 lb/ft of width	ASTM D1970	Gross Coverage	108 sq ft
Tear Strength @ 73.4°F	55 lbf	ASTM D6164	Adhesion to Plywood @ 75°F	25 lb/ft of width	ASTM D1970	Weight	73 lb (nominal)
Low Temperature Flexibility	0°F	ASTM D6164	Thermal Stability, max	0.1 in	ASTM D1970		

WARRANTY

Tarco Specialty Products, Inc. offers 10, 15, 20 and 25 Year Limited Warranties.

NOTE: All statements, information and data, given herein are believed to be accurate and reliable but are presented without guaranty, warranty or responsibility of any kind, expressed or implied, except as may be indicated otherwise in this literature. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent.

Tarco

One Information Way, Suite 225 ◆ Little Rock, AR 72202
501-945-4506 ◆ 800-365-4506 ◆ Fax: 501-945-7718 ◆ www.tarcoroofing.com

