


EasyStick™ Plumbing Vent Detail

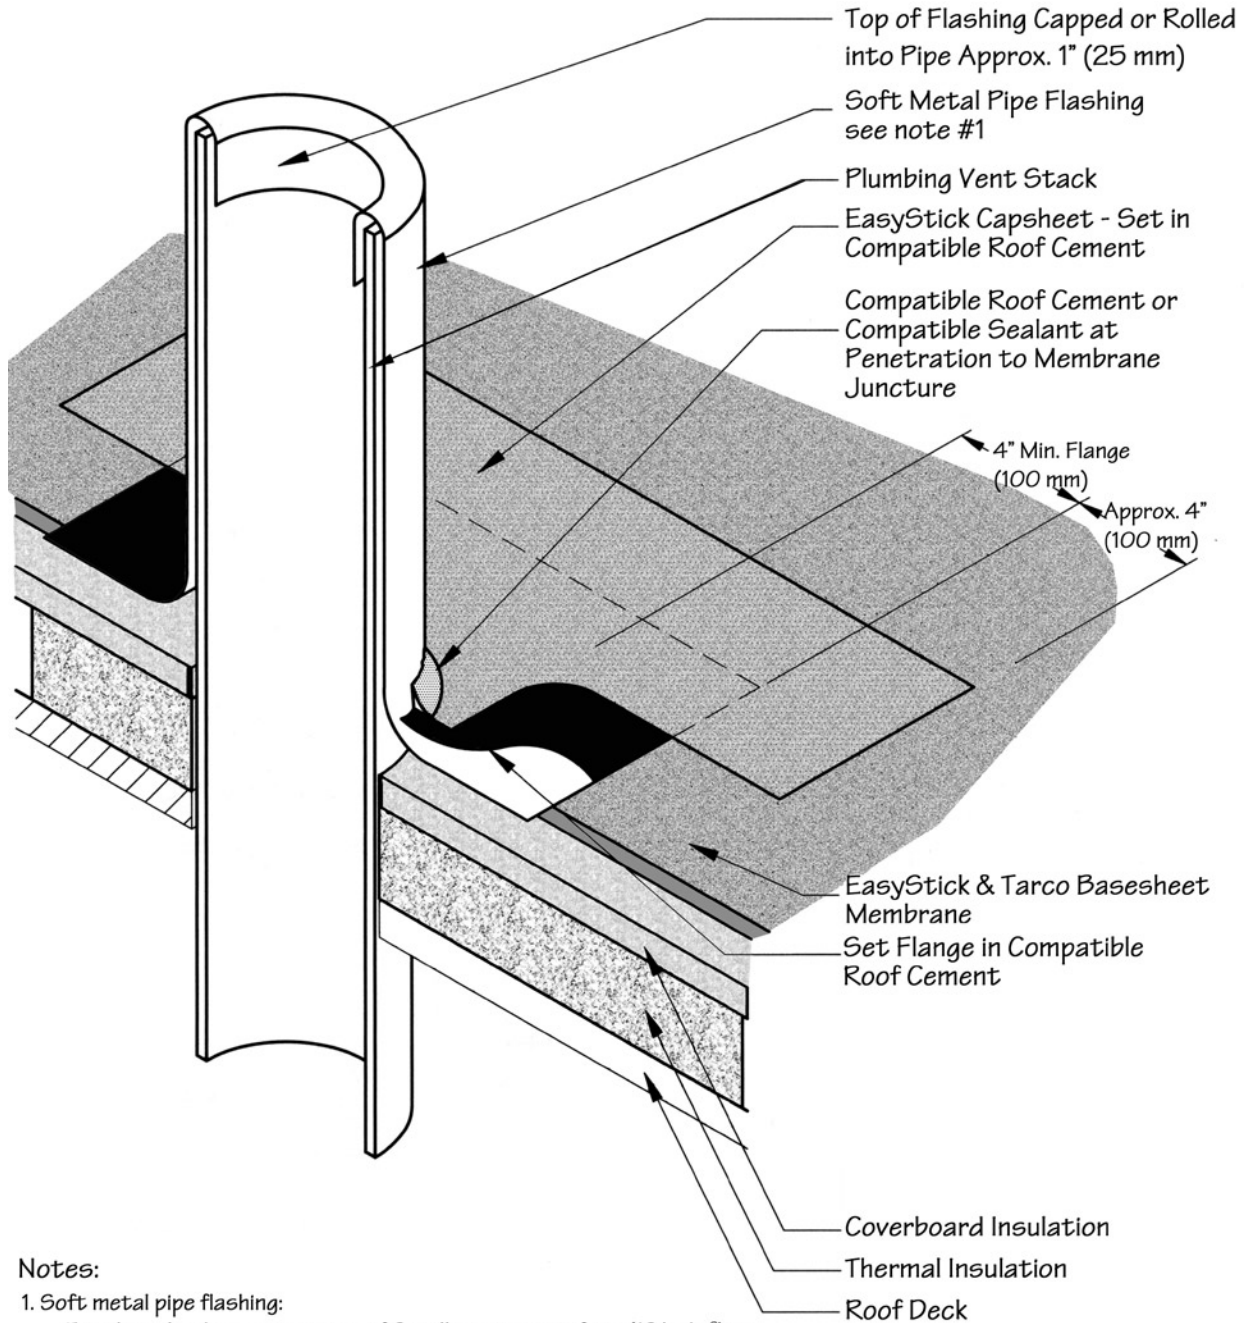

Notes:

1. Soft metal pipe flashing:

For sheet lead, use a minimum of 2 1/2 lb. per square foot (12 kg/m²) or

For sheet copper, use a minimum 16 oz. (5 kg/m²)

2. If using copper flashing over an iron or steel pipe, insert a separator sheet (e.g., asphalt saturated roofing felt), wrapped around pipe, to separate the copper flashing from direct contact with pipe, to reduce galvanic action.

3. Vent stacks and other pipes should have a minimum of 12 inches (300 mm) of clearance on all sides from walls, curbs, and other projections to facilitate proper flashing.